


What Would Good Have Looked Like 60 Lifting/moving concrete rings

ExxonMobil

What Happened?

- At the end of a job the digger driver was trying to move the concrete ring back across the entrance as he was leaving.
- He was rushing and pushed it with his bucket rather than using the lifting pins
- The concrete ring broke.

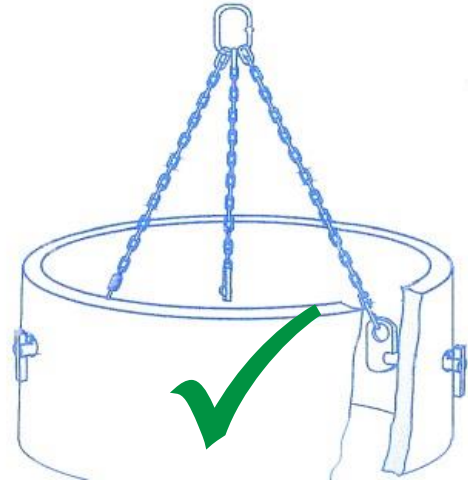

What's the Worst Thing That Could Happen?

Damage to equipment is not acceptable. Other damage or injury to personnel could be caused by rushing the job

What could have been done differently ?

- ✓ Use the correct tools for the job – lifting pins
- ✓ Don't rush your work. If under pressure and feel you are not working safely, STOP THE JOB.
- ✓ Planning ahead by management to ensure sufficient time available to finish the job without rushing.



– Environmental Services